

**KS 7HP-950A GASOLINE
CULTIVATOR ASSEMBLY
INSTRUCTION**

K&S | **Könner
&
Söhnen**

TRADITIONELLE DEUTSCHE QUALITÄT

TRADITIONELLE DEUTSCHE QUALITÄT


Please, read this manual
before use!

Manual



GASOLINE TILLERS

**KS 7HP-950A
KS 7HP-950S**

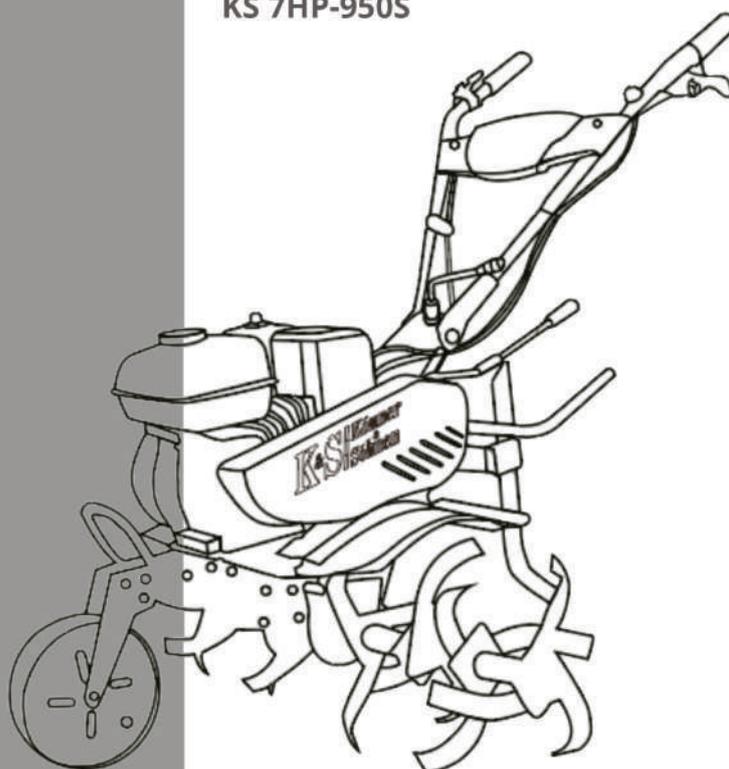

K&S | **Könner
&
Söhnen**

Please read the assembly instruction carefully
before getting started!

TRADITIONELLE DEUTSCHE QUALITÄT

Fig. 2. Install the plow holder mount on the cultivator frame with the locking pin.


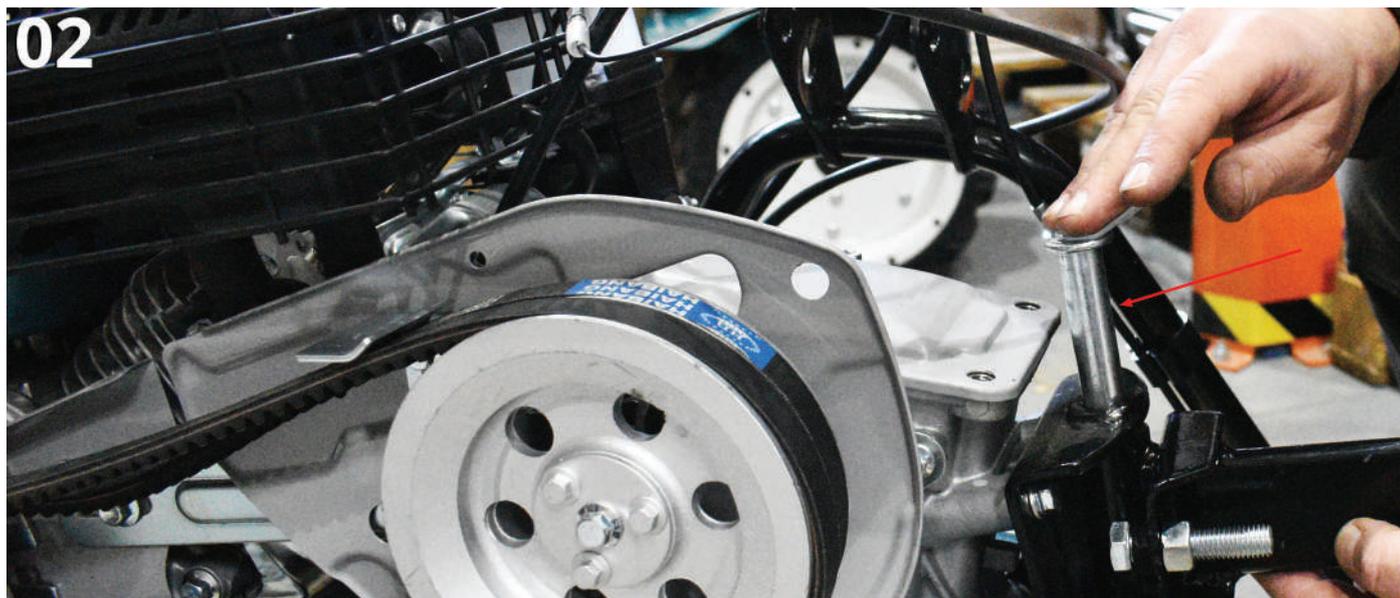


Fig. 3. Secure the locking pin with a cotter pin.

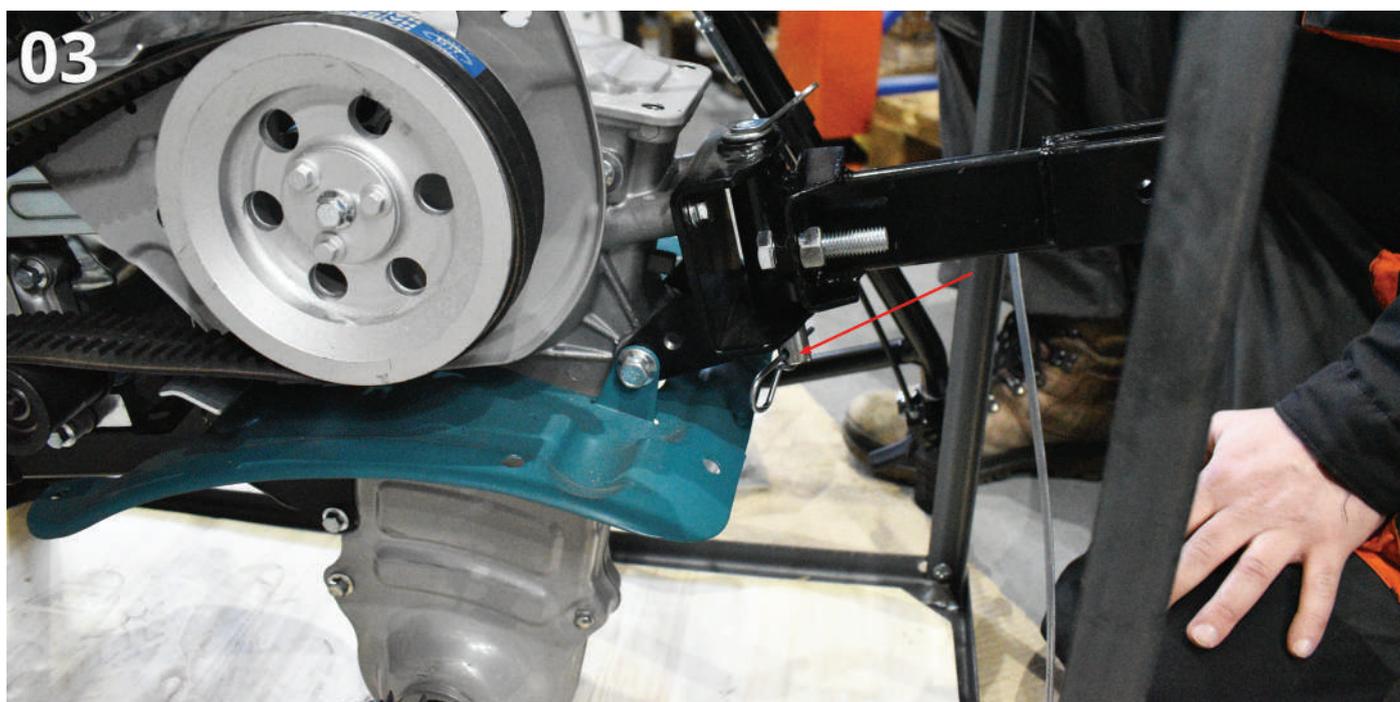

TRADITIONELLE DEUTSCHE QUALITÄT

Fig. 4. Adjust the angle of rotation of the plow holder mount and fix it with screws and nuts. Secure the selected position with a locknut.


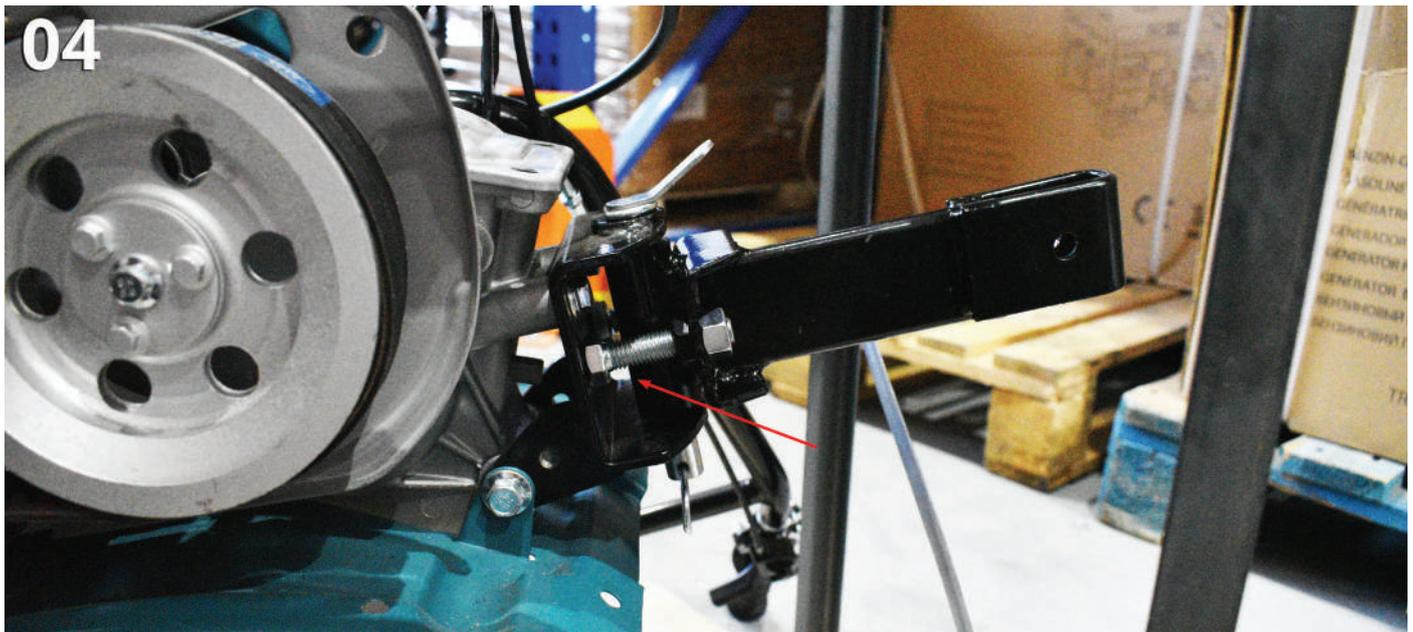


Fig. 5. Mount the transport wheel on the cultivator frame. Secure the wheel with a locking pin and cotter pin.

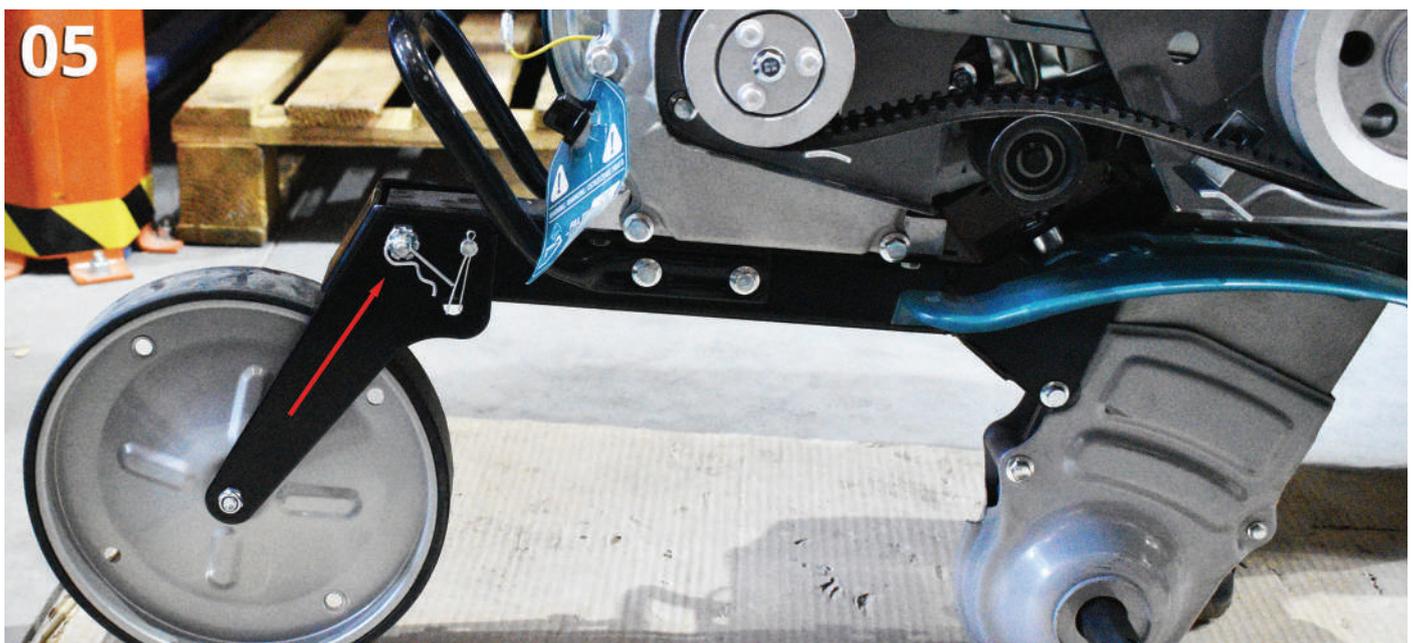

TRADITIONELLE DEUTSCHE QUALITÄT

Fig. 6. Cultivator frame.

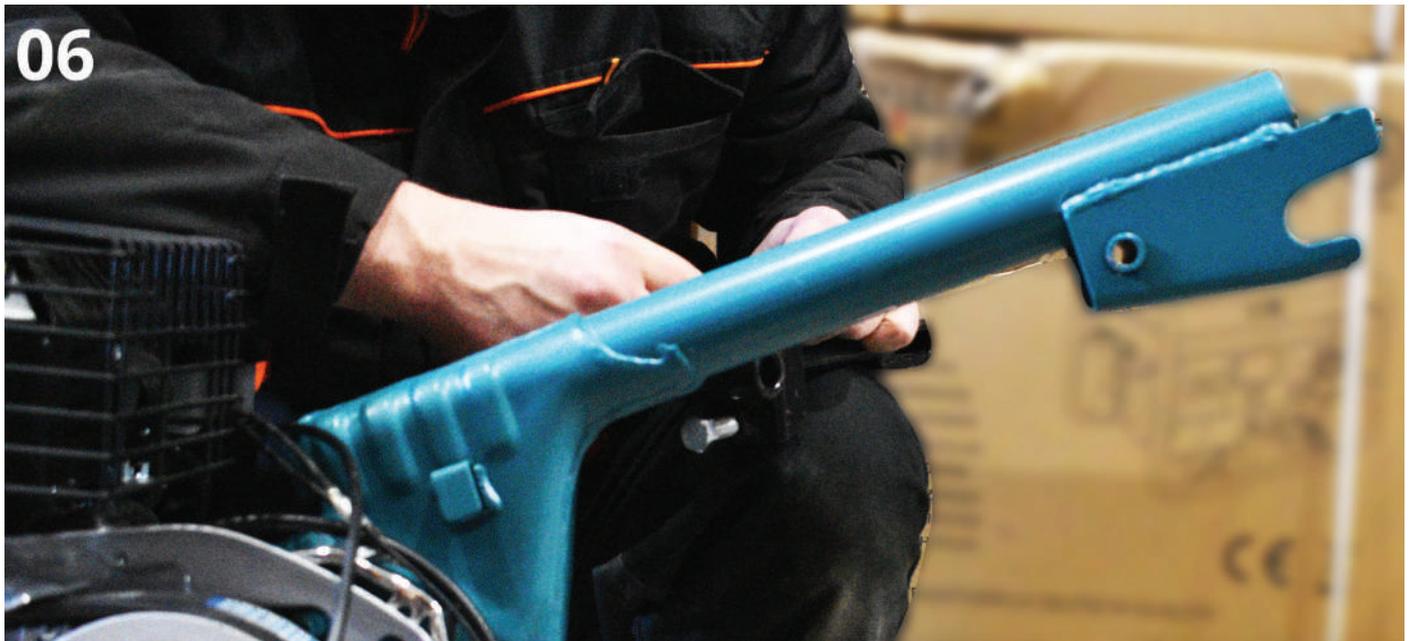


Fig. 7. Lock the position of the control handle with the clamp fixture.



TRADITIONELLE DEUTSCHE QUALITÄT

Fig. 8. Fasten the protective cover with the screw to the joints of the cultivator frame and the control handle.


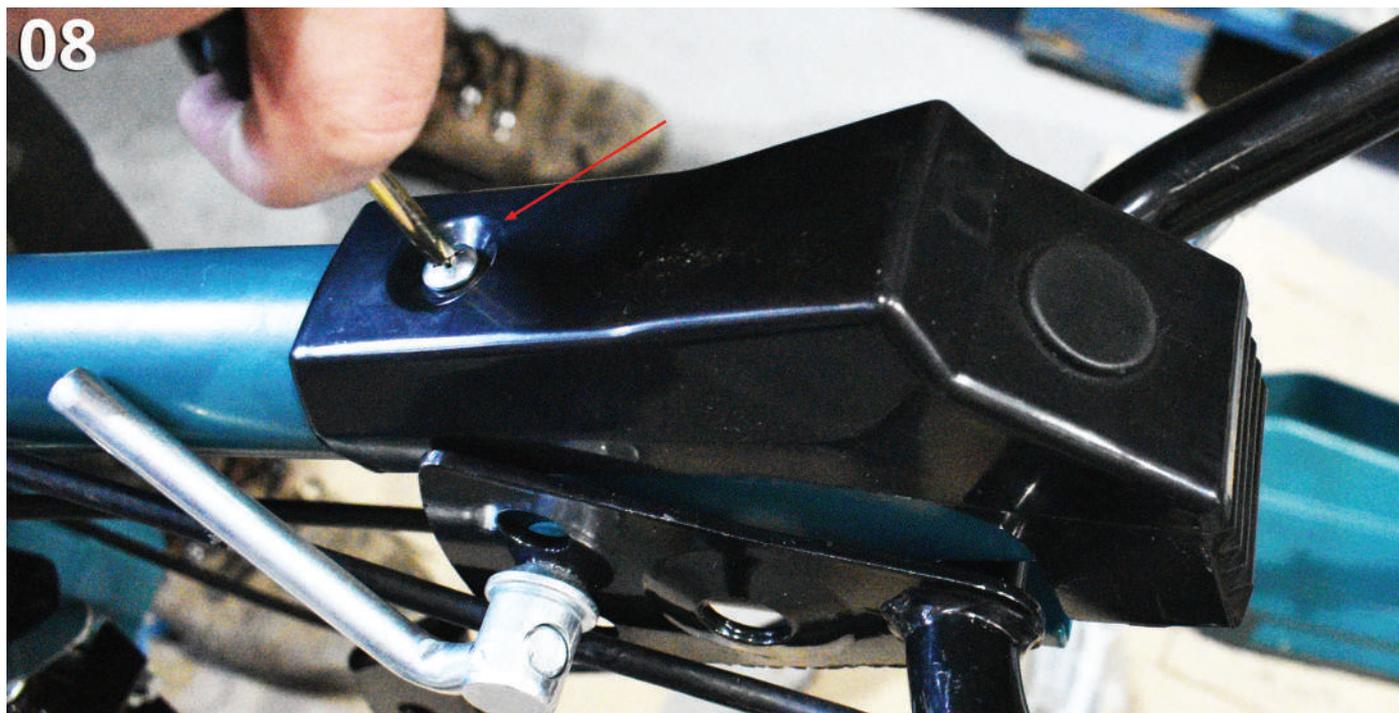


Fig. 9. Secure the fender to the cultivator with bolts and nuts.

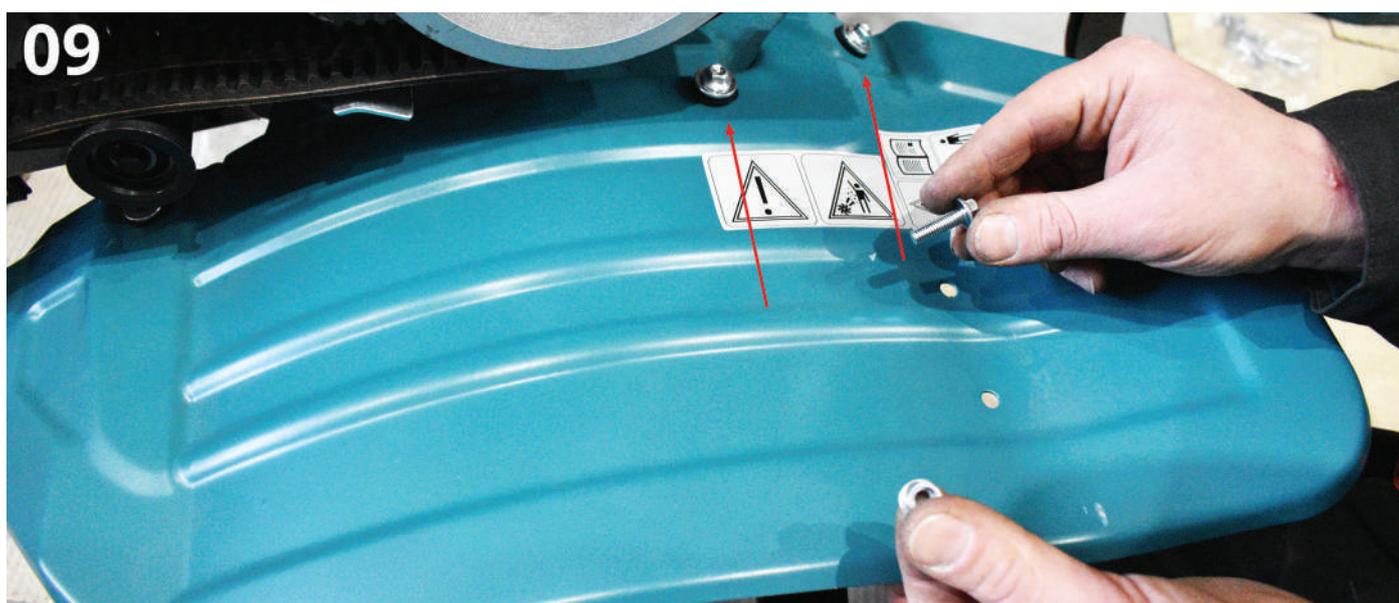

TRADITIONELLE DEUTSCHE QUALITÄT

Fig. 10. Install the shift lever.

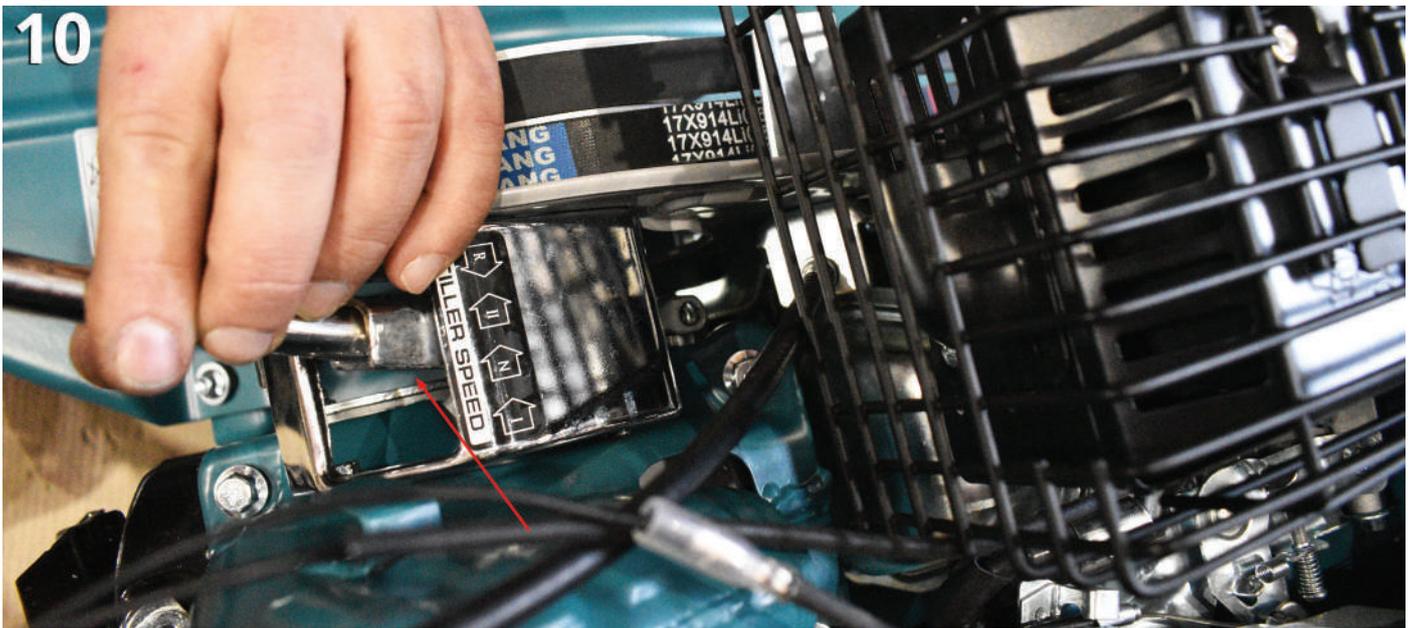


Fig. 11. Secure the shift lever extension with a locking pin, and then secure the locking pin with a cotter pin.




TRADITIONELLE DEUTSCHE QUALITÄT

Fig. 12. Secure the protective cover to the cultivator body with screws.



Fig. 13. Place an assembled cutter set* on the cultivator axle. Secure the cutters with a locking pin.

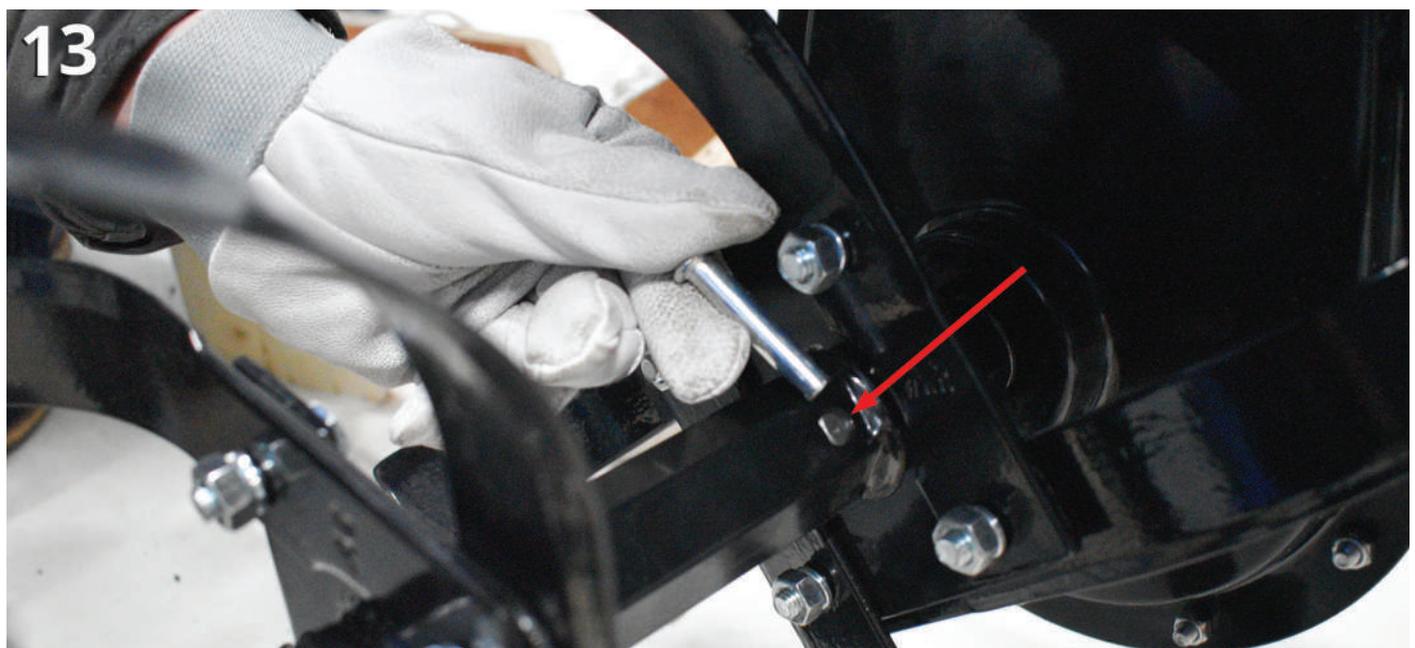

*The sequence for assembling the cutters can be found at the end of this instruction.

TRADITIONELLE DEUTSCHE QUALITÄT

Fig. 14. Secure the support strip to the fenders from below with screws and nuts.


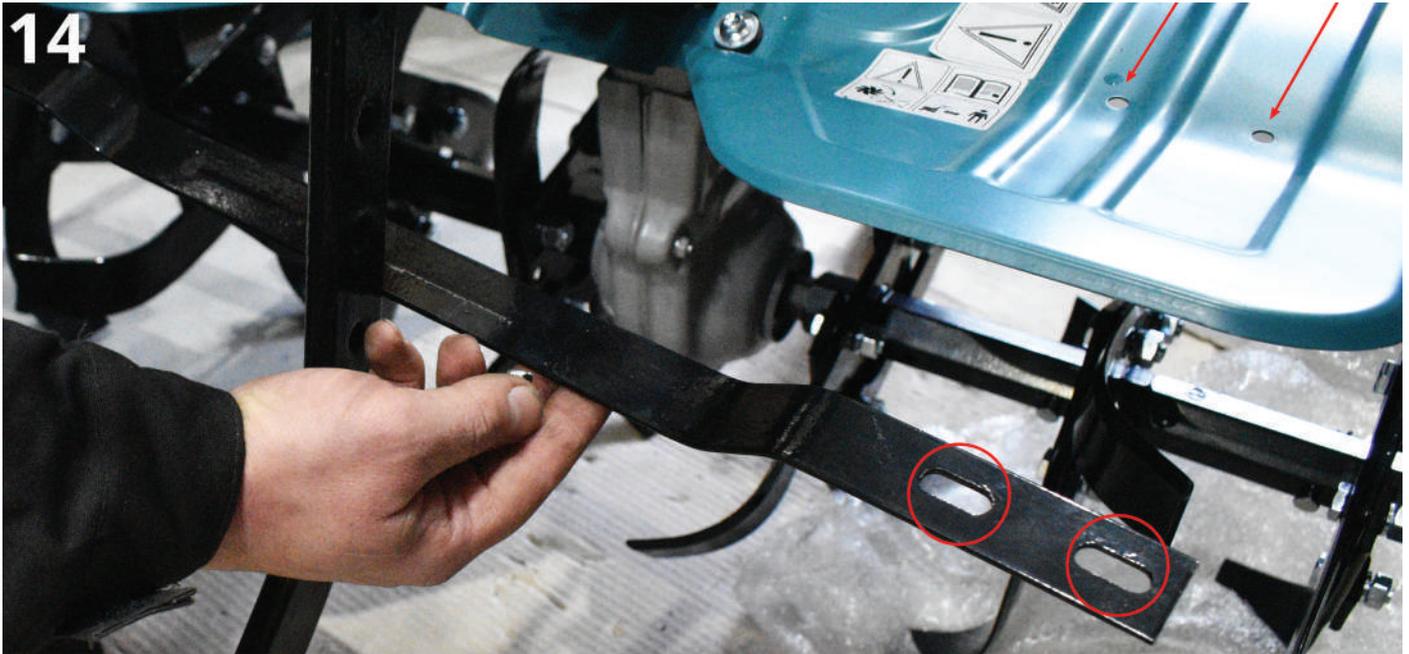


Fig. 15. General view of the assembled KS 7HP-950A cultivator.



TRADITIONELLE DEUTSCHE QUALITÄT

Fig. 1. General view of the semiaxle for cutters, assembled and disassembled.

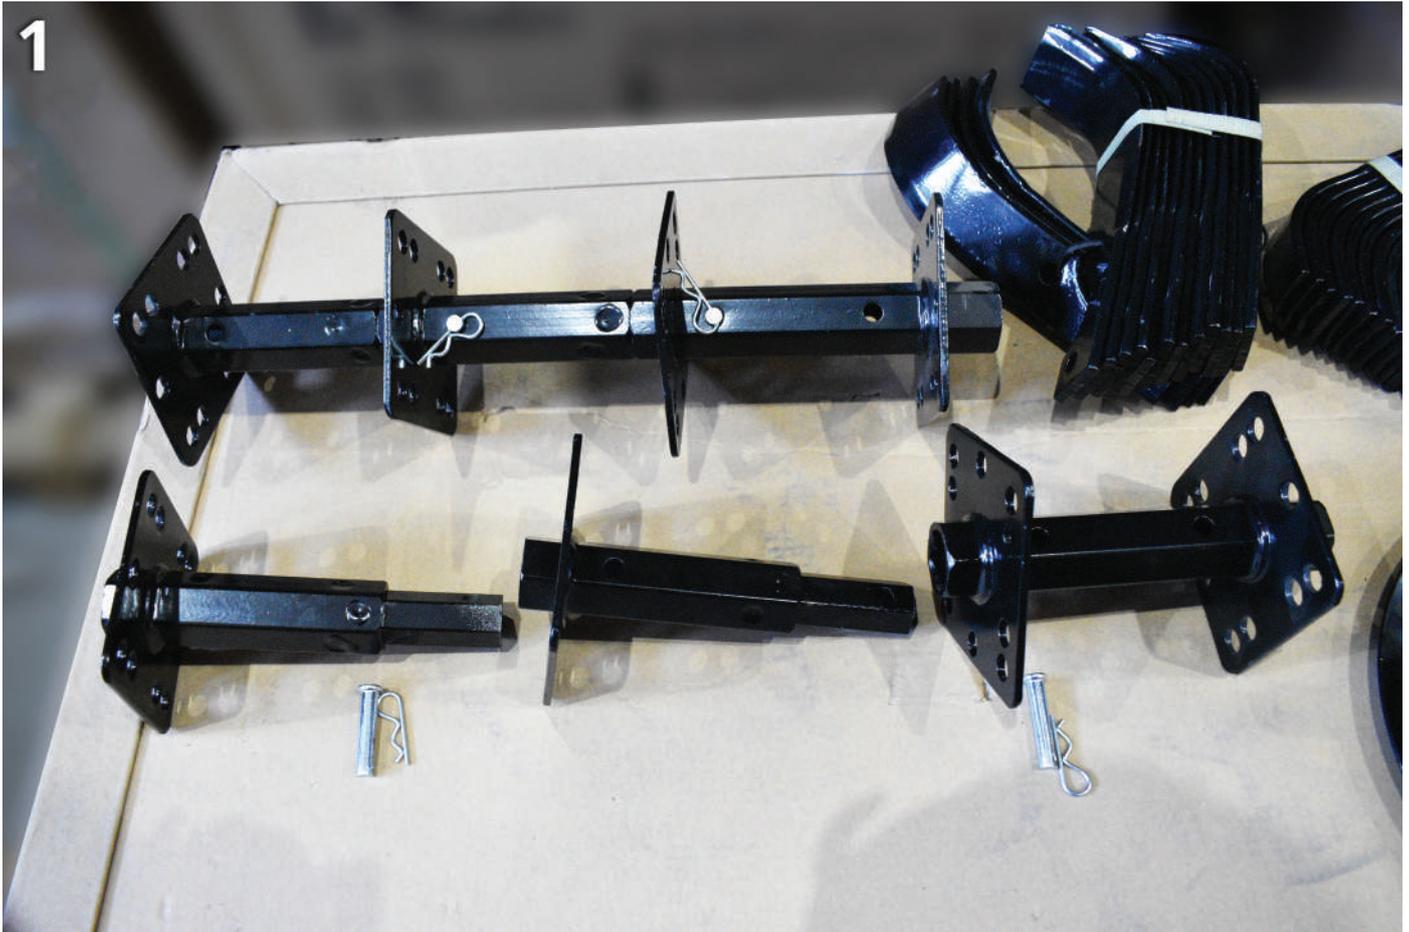

TRADITIONELLE DEUTSCHE QUALITÄT

Fig. 2. Each cutter (left and right) consists of several sections. The cutting edge of the knives should be at the front (in the direction of travel of the cultivator).



Fig. 3. Assemble the cultivator's left cutters. The left knives have their cutting edge against the user pointing to the left, with the right knives having their cutting edge against the user pointing to the right.



TRADITIONELLE DEUTSCHE QUALITÄT

Fig. 4. Attaching knives using the example of one of the sections of the left cutter. Attach the 2 left knives to the outside of the base so that the bends point to the left opposite each other.



Fig. 5. Attach the 2 right knives to the inside of the base so that the bends point to the right opposite each other. The cutting edge of all knives should be at the front (in the direction of travel of the cultivator).




TRADITIONELLE DEUTSCHE QUALITÄT

Fig. 6. Secure the knives with screws and nuts.



Fig. 7. Connect the sections together using locking pins, and then secure the locking pins with cotter pins.

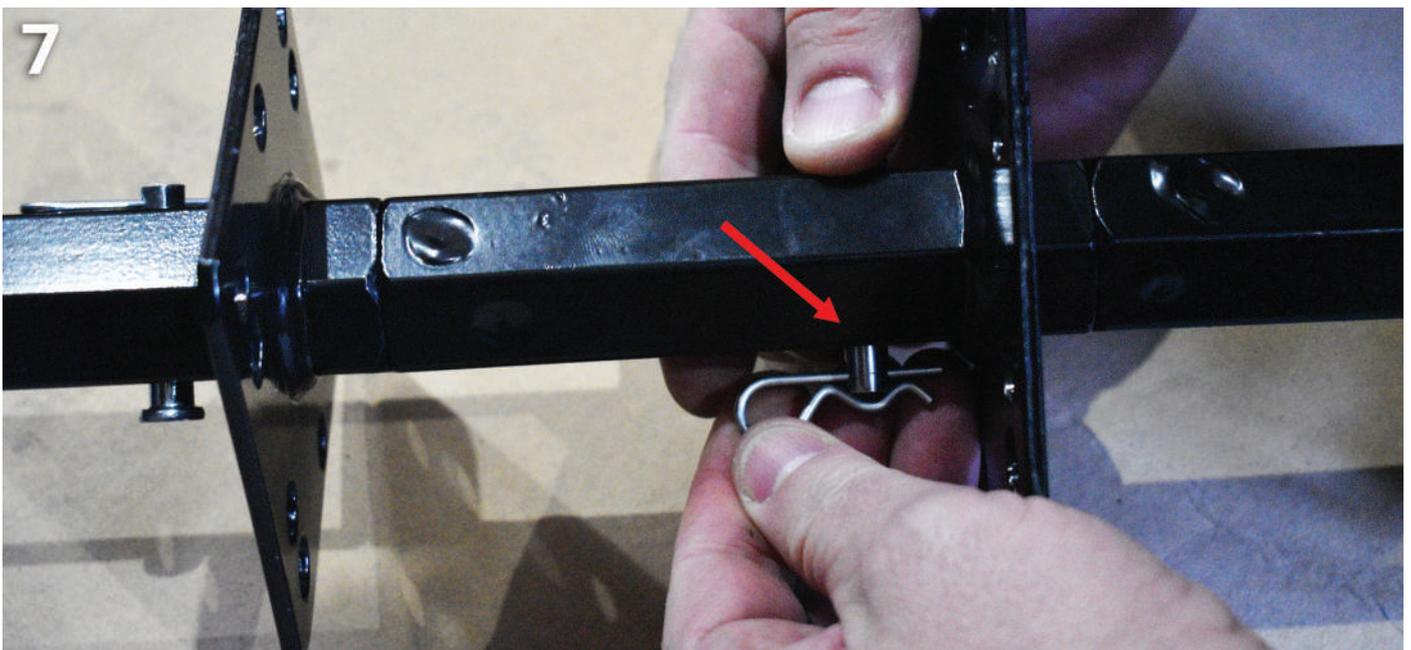

TRADITIONELLE DEUTSCHE QUALITÄT

Fig. 8. General view of the assembled left cutter. Each section should be fixed on an axle with an offset from the previous one by 45 degrees clockwise.



Fig. 9. The right cultivator cutters are mounted inversely. The cutting edge of the knives should be at the front in the direction of travel of the cultivator.

